

## Sheet Repair Tape

The fixing band aid for durable repair to your trailer tarpaulin. It consists of very strong PVC tarpaulin (650gr/m<sup>2</sup>) combined with reinforced specially developed pressure sensitive double side adhesive tape. The fixing band aid sticks to all dry and clean PVC tarpaulins without silicones.

The self-adhesive tape is waterproof and can be used in temperatures from -40 to +80°C. Storage and processing from +12 to 21°C at 30 to 60 % humidity in the closed bag. Disposal through regular waste.

### Application instruction -

Clean the damaged area thoroughly. - Measure the required size and cut of this length from the roll. - Make sure the damaged area is straight and wrinkle free before applying the band aid. - Pull off the transparent release liner and carefully position the band aid over the damaged area, use sufficient pressure to apply the band aid.

**Caution!** It cannot be repositioned after it is applied to the tarpaulin!



#### **N1000775**

Sheet-repair tape silver  
RAL9006 100mm x 5m



#### **N1007386**

Sheet-repair tape yellow  
RAL1023 100mm x 5m



#### **N1007387**

Sheet-repair tape grey  
RAL7038 100mm x 5m



#### **N1007388**

Sheet-repair tape white  
RAL9016 100mm x 5m



#### **N1007389**

Sheet-repair tape red  
RAL3001 100mm x 5m



#### **N1007390**

Sheet-repair tape blue R  
AL5002 100mm x 5m



*Carefully clean the area to be taped with a grease-free and silicon-free cleaning agent*



*Make sure that all dirt, grease, oil, etc. is removed from the surface to be repaired  
Ensure that the surface is completely dry before applying the tape*




*Cut the required length of repair tape, from the roll*



*Remove the transparent film on the back of the tape*



*Apply the self-adhesive tape to the cleaned area of sheet to be repaired  
Firmly press the tape onto the sheet, for several seconds.*

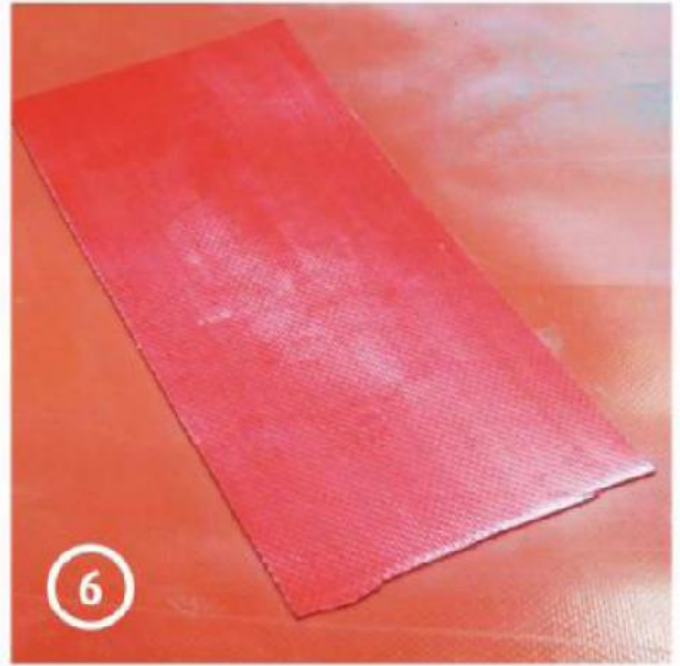

*Your sheet is now soundly repaired and you have avoided unnecessary costs.*